



Global Leading Manufacturer of High Thermal Conductivity IMS CCL

High Thermal Conductivity IMS CCL Datasheet

广东博钰电子有限公司

GuangDong BOYU Electronics CO.,Ltd





Introduction

GuangDong BOYU Electronics is a high-tech enterprise which integrates R&D, production, service and one-stop solutions and concentrates on providing high-quality products of Aluminum and Copper Based CCL and special metal CCL to our customers.

The company has been awarded a series of international certifications such as ISO, UL, SGS, IATF16949 and ROHS.

The company is committed to the global market and has successfully exported products to Europe, USA, Southeast Asia and other countries and regions.

The company adheres to the business strategy of "Using the most advanced technology, Training high-quality employees, Manufacturing high-quality products", striving for innovation and contributing to the development of new technology and new materials for the electronic industry.

产品应用

- LED Backlighting
- LED Backlighting
- 大功率照明
- High power LED
- 工控散热方案
- Industrial cooling solutions

产品特性

- 高导热特性
- High thermal conductivity
- 出色的耐热性
- Excellent heat resistance
- 符合 RoHS 要求
- Meet the RoHS requirements
- 无卤素板材
- Halogen-free
- UL E513122
- UL E513122
- 符合 UL 94V-0
- Comply with UL 94V-0





AL-01-B30L 产品性能表

性能 PROPERTIES	测试方法 TEST METHOD	单位 UNIT	指标值 INDICATOR	典型值 TYPICAL VALUES
------------------	---------------------	------------	------------------	-----------------------

热性能 THERMAL PROPERTIES

绝缘层热导率 Thermal conductivity	ASTM E1461	W/m.K	—	3.0
热阻 Thermal resistivity	ASTM D5470	K.cm ² /W	—	0.55
玻璃化温度 Tg	DSC	°C	—	110
热分解温度 TD	TGA (Wt5%loss)	°C	≥360	380
最大操作温度 MOT	UL94	°C	—	130
热应力 Thermal stress	Solder floating 288°C	Minute	≥15	25

电性能 ELECTRICAL PROPERTIES

体积电阻 Volume resistivity	IPC-TM-650 2.5.17	MΩ.cm	≥10 ⁶	10 ⁸
表面电阻 Surface resistivity	IPC-TM-650 2.5.17	MΩ	≥10 ⁴	10 ⁷
介电常数 Dielectric constant	IPC-TM-650 2.5.5.3	1MHz	—	4.8
损耗系数 Dissipation factor	IPC-TM-650 2.5.5.3	1MHz	—	≤0.02
击穿电压 Breakdown voltage	IPC-TM-650 2.5.6.2	AC/KV	—	5.0
耐电弧 Arc resistance	IPC-TM-650 2.5.1	S	≥60	120

机械性能 MECHANICAL PROPERTIES

剥离强度 Peel strength	IPC-TM-650 2.4.8	Lb/in	≥8	8.5
吸水率 Moisture absorption	D-24/23	%	≤1.5	0.5
	IPC-TM-650 2.6.2.1			

机构评级&阻燃性 AGENCY RATINGS&DURABILITY

U.L. 可燃性 Flammability	UL94	Class	V-0	V-0
相对漏电起痕指数 CTI	IEC60112	V	≥600	600

Remarks: Typical value is based on specimen of 1.5mm AL\ 120μm dielectric

高导热金属基覆铜板


High Thermal Conductivity IMS CCL

产品介绍

Introduction of products

高导热金属基覆铜板能够针对不同的应用领域要求、各种铜厚、绝缘层特性、不同金属背板的需求，提供符合客户要求的高性价比产品。

For different areas of application requirements, various copper thickness, insulating layer characteristics and the need of different metal backboard, we can provide cost-effective metal based copper clad laminate with high thermal conductivity that meet customers' requirements.

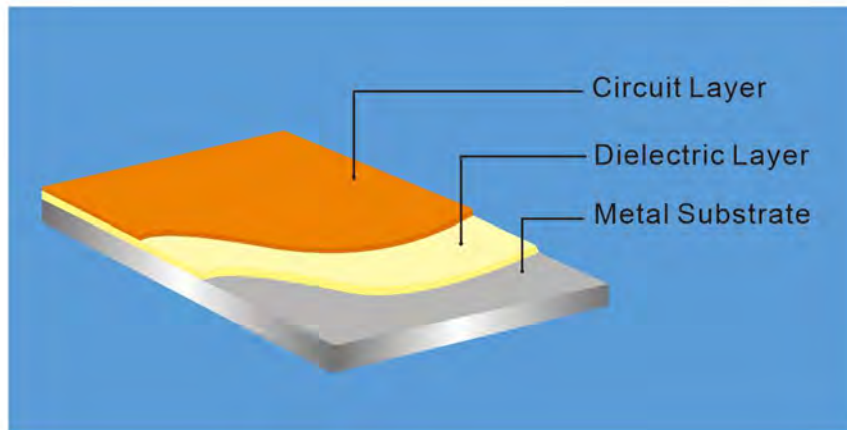

产品规格

Specification of products

Standard BOYU Material Overview		
BOYU Material Type		AL-01-B30L
Thickness of Thermal Conductive (μm)	Mass Production	120
	Sample	100
Base Copper (μm)	Mass Production	35、70、105
	Sample	140、210
Aluminum Thickness (mm)	Mass Production	0.5-3.0
	Sample	3.0-5.0
Aluminum Type	Mass Production	1060、3003、5052
Laminate Size(mm)	Mass Production	1000X1200、1050X1250
	Sample	Specified (MOQ 100sheet)
Remark:	Finish thickness=Aluminum Thickness +Thickness of Thermal Conductive+Base Copper	

Globalization
Care
Cooperation
Win-Win

广东博钰电子有限公司

中国广东省惠州市惠澳大道惠南高科技产业园民富路2号
2.Min-Fu R.D, HuiAo Street, South of Huizhou High-tech
Industrial Zone. Huizhou City, Guangdong Province, China.
TEL:0752-6811106 FAX : 0752-6811109
[Http://www.boyu-global.com](http://www.boyu-global.com)
E-mail: sales@boyu-global.com

