




DATA SHEET FELIOS FLEX

FELIOS FLEX ADHESIVELESS FLEXIBLE LAMINATE

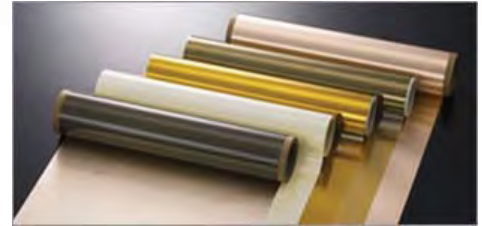

Description

Panasonic FELIOS® Adhesiveless Flexible Laminates are the ideal choice for technically advanced Multilayer, Rigid-flex, Double and Single sided applications. FELIOS® Flex is an engineered, all Polyimide Substrate with premium copper foil bonded on two sides. FELIOS® Flex is currently used in many of today's advanced flexible applications such as Avionics, Computers, Medical Equipment, Hand Held Computers, and Instrumentation.

Features

- Superior Dimensional Stability
- Excellent Copper Foil Bond Strength
- Consistent dielectric thickness and electrical performance
- Halogen and Antimony Free
- UL94-V0, 160° C UL Operating Temperature
- Certified to IPC 4204/11, wide processing window
- 31032 Tested, 340° C Tg, RoHaS Compliant

Product Offering

RF775-Double Sided	<u>Polyimide Thickness</u>	<u>Copper Foil RA*</u>
	.00058"	Q, T, H, 1 oz
	.0008"	Q, T, H, 1 oz
	.001"	Q, T, H, 1, 2 oz
	.002"	Q, T, H, 1, 2 oz
RF770-Single Sided	<u>Polyimide Thickness</u>	<u>Copper Foil RA*</u>
	.0008"	T, H, 1 oz
	.001"	T, H, 1 oz
	.002"	T, H, 1 oz

* ED Foil available on request

General Characteristics

Property	Unit	Test Method	R-F775/778		
			25μ	50μ	100μ
Peel Strength	kN/m	IPC-TM-650 2.4.9			
As Fabricated			1.7	1.7	1.7
After Solder			1.7	1.7	1.7
Solder Float	288°C		Pass	Pass	Pass
Tensile Strength	MPa	IPC-TM-650 2.4.19	500	500	500
Tensile Modulus	Gpa	IPC-TM-650 2.4.19	7.1	7.1	7.1
Elongation	%	IPC-TM-650 2.4.19	93	93	93
Poisson's Ratio			0.3	0.3	0.3
MIT Folding Endurance		JIS C6471 R=0.38	220	60	
Water Absorption	%	IPC-TM-650 2.6.2	1	1	1
Moisture Absorption	%	23°C, 50%RH, 24 hr	0.7	0.7	0.7
Dielectric Thickness Tolerance	%	IPC-TM-650 4.6.2	±10	±10	±10
UL Flammability		UL-94	94V-0	94V-0	
Dielectric Constant	1 MHz	IPC-TM-650 2.5.5.3	3.2	3.2	3.2
Dissipation Factor	1 MHz	IPC-TM-650 2.5.5.3	0.002	0.002	0.002
Dielectric Strength	kV/ml	ASTM-D-149	7	7	7
Volume Resistivity	ohm-cm	IPC-TM-650 2.5.17.1	>1E+14	>1E+14	>1E+14
Surface Resistivity	ohms	IPC-TM-650 2.5.17.1	>1E+14	>1E+14	>1E+14
Moisture & Insulation Resistance	ohms	IPC-TM-650 2.6.3.2	>1E+13	>1E+13	>1E+13
Initiation Tear Strength	g	2.4.26	1700		
Chemical Resistance	min, %	2.3.2	Pass, >95	Pass, >95	Pass, >95
Propagation Tear Strength	g	2.4.17.1	10	20	
Solderability		IPC-S-804, M.1	Pass	Pass	Pass
Glass Transition (Tg)	C		343	343	343
Flexural Endurance	mn, cycles	2.4.3	>10000	>10000	>10000
Dimensional Change after etch MD/TD	%	IPC-TM-650 2.2.4 (B)	0.017/0.030	0.009/0.016	0.010/0.017
Dimensional Change after heat MD/TD	%	IPC-TM-650 2.2.4	0.012/0.009	0.007/0.010	0.007/0.014
Coefficient of Thermal Expansion	ppm/k	TMA 250°C-100°C	18	18	18
Coefficient of Humidity Expansion	ppm/%RH	23°C, 24 hrs	10	10	10
Thermal Conductivity	W/mK	Laser Flash Method	0.24	0.24	0.24
Specific Heat	J/gK	Laser Flash Method	1.13	1.13	1.13
Density	g/cm3	Laser Flash Method	1.47	1.47	1.47

Contact Us

For more information about the Panasonic FELIOS® Adhesiveless Flexible Laminates, please contact our Customer, or Technical Service Group at 866-862-8749, or visit our Website www.matrixusa.us

The information given herein is based on data believe to be reliable, but Panasonic makes no warranties express or implied as to its accuracy and assumes no liability arising out of its use by others. This publication is not to be taken as a license to operate under, or recommendation to infringe any patent.